



Catalog Number	
Notes	
Type	

TECHNICAL SPECIFICATIONS						
Model No.	ALI-40-10"	ALI-80-10"	ALI-40-14"	ALI-80-14"	ALI-120-14"	ALI-150-18"
Power Consumption(±10%)	15/20/30/40 W Selectable	40/50/60/80 W Selectable	15/20/30/40 W Selectable	40/50/60/80 W Selectable	60/90/100/120 W Selectable	80/100/120/150 W Selectable
Power Supply	Adjustable Driver					
Input Voltage	120-277 VAC 50/60 Hz					
Power Factor	≥0.90					
Control	0-10V (Dimmable)					

OPTIC SPECIFICATIONS						
LED Type	SMD2835					
Luminous Flux (±10%)	6000LM (40W)	12000LM (80W)	6000LM (40W)	12000LM (80W)	18000LM (120W)	22500LM (150W)
Efficacy(4000K Ra80)	up to 150 lm/w					
Correlated Color Temperature	3000K, 4000K, 5000K (Selectable)					
Color Rendering Index	>Ra80					
Beam Angle	Type IV					
UGR level	N/A					

DESCRIPTION

The Big Shine LED Aloith Wall Pack offers adjustable power and selectable color temperature (3000K, 4000K, 5000K) for customizable illumination in commercial and industrial settings. Built for durability and efficiency, it features high-lumen output, IP65-rated weather resistance, and long-lasting LED technology to reduce maintenance costs. Ideal for building exteriors, parking lots, walkways, and security lighting, the Aloith Wall Pack delivers reliable, high-performance lighting tailored to any outdoor space.

APPLICATION(S)

- Building Exteriors & Perimeters
- Parking Lots & Walkways

MOUNTING AND PRODUCT DIMENSIONS

Product Dimension	10"	10"	14"	14"	14"	18"
Mounting Option	Wall Mount with 1/2" knockouts on each side					
Material	Die Cast Aluminum					
Lens	Lens (Glass or Polycarbonate)					
Fixture Color	Bronze					
IK Rating	N/A					
IP Rating	IP65					

LIFESPAN AND WARRANTY

Operating Temperature	~40°F to 113°F
Warranty	5 Years


SAFETY CERTIFICATIONS

Luminaires (UL 1598:2021 Ed.5)
Luminaires (CSA C22.2#250.0:2021 Ed.5)

MOUNTING OPTIONS

Flush Mount

DIMENSIONS

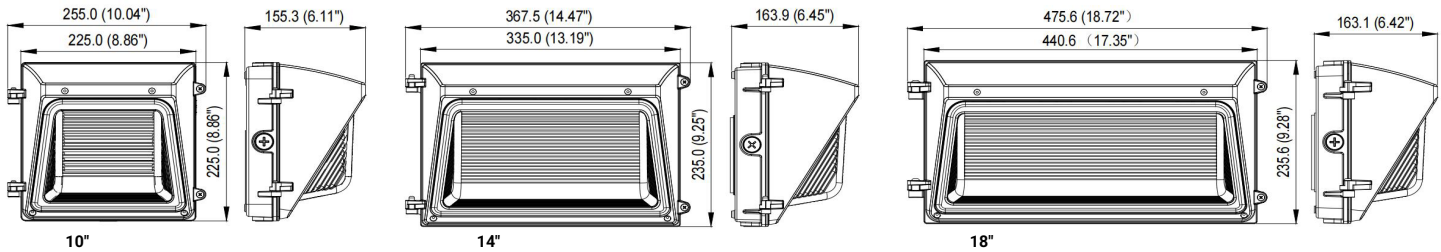

ORDERING INFORMATION

Series	Wattage & Lumen Output	Voltage	Corelated Color Temperature (CCT)	Beam Angle	Control Options	Mounting Option
ALI (Wattage - Size)	15/20/30/40W Selectable (10") 40/50/60/80W Selectable (10") 15/20/30/40W Selectable (14") 40/50/60/80W Selectable (14") 60/90/100/120W Selectable (14") 80/100/120/150W Selectable (18")	MV (120-277V)	30K (3000K) 40K (4000K) 50K (5000K)	IV (Type IV)	0-10V (Dimmable)	FM (Flush Mount)

Accessories
EMB (Battery Back-up)