




DESCRIPTION

The Capella Canopy Light is a durable and efficient lighting solution for commercial, industrial, and recreational spaces. Featuring a wide 160° beam angle, it ensures even light distribution, reducing dark spots. Its aluminum alloy heat sink enhances longevity, while optional occupancy sensors improve energy efficiency. Designed for flush or pendant mounting, the IP65-rated fixture is versatile, weather-resistant, and easy to install.


APPLICATION(S)

- Parking Garages
- Walkways & Pathways
- Retail & Commercial Centers

PHOTOMETRY



40W

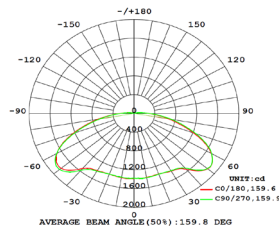

60W

MOUNTING OPTIONS

- Surface Mount
- NPT Pendant Mount

Catalog Number	
Notes	
Type	

TECHNICAL SPECIFICATIONS

Model No.	CAP-40	CAP-60
Power Consumption(±10%)	40W	60W
Power Supply	LED Driver	
Input Voltage	100-277V 50/60 Hz	
Power Factor	0.9	
Surge Protection	N/A	
Total Harmonic Distortion	10.60%	14.51%
Control	Continuous Dimming to 10% or below	
Reported BUG Rating	B3 U3 G2	

OPTIC SPECIFICATIONS

LED Type	Nichia	
Luminous Flux (±10%)	5200lms	7800lms
Efficacy(4000K Ra80)	130 lms/w	
Correlated Color Temperature	4000K, 5000K, 5700K	
Color Rendering Index	Ra84	
Beam Angle	160°	
UGR level	N/A	

MOUNTING AND PRODUCT DIMENSIONS

Product Dimension	11.37" Diameter X 4.49" Height	
Luminaire Net Weight	6.83 Lbs	8.6 Lbs
Mounting Option	Surface Mounted, NPT, Pole Mount	
Material	Aluminum and PC	
Finish	Powder Coating	
Fixture Color	White	
IP Rating	IP65	


LIFESPAN AND WARRANTY

Operating Temperature	(-) 4°F to 104°F
Warranty	5 Years

SAFETY CERTIFICATIONS

- Luminaires (UL 1598:2021 Ed.5)
- Luminaires (CSA C22.2#250.0:2021 Ed.5)

DIMENSIONS

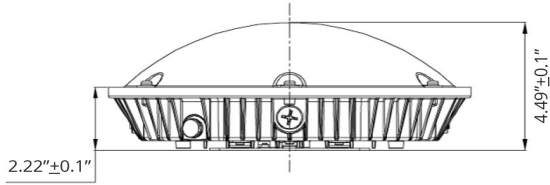

ORDERING INFORMATION

Series	Wattage & Lumen Output	Voltage	Corelated Color Temperature (CCT)	Beam Angle	Control Options
CAP (Capella Canopy Light)	40W (5200lm) 60W (7800lm)	MV (100-277V)	40K (4000K) 50K (5000K) 57K (5700K)	160D (160°)	0-10V (Continuous Dimming to 10% or below)
Finish Color	Accessories				
WH (White)	EMB (Battery Back-up)				